


Product data sheet – Single-use lifting strap

Product description

The **single-use lifting strap** is ideal for transporting goods from the production facility to the consumer. In accordance with DIN 60005, single-use lifting straps can only be used once and must be destroyed and disposed of at the end of the transport chain. They can be recognised above all by the orange label with a notice regarding single use. The minimum breaking strength of single-use lifting straps is equal to five times the load-bearing capacity.

They are lightweight and highly flexible and therefore provide optimum handling characteristics. They are used both on the shop floor and on construction sites.

Following successful transport of the goods, the lifting straps can be detached easily. The single-use lifting straps are available in the following effective working lengths: 40 cm, 50 cm, 60 cm, 80 cm, 100 cm and 120 cm.

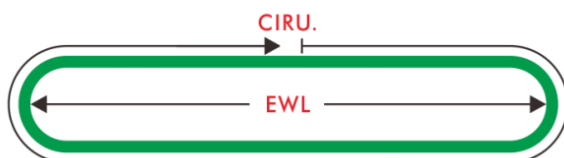






Advantages

- Cost-effective transport aids
- Easy handling and disposal
- Flexible, lightweight lifting tackle
- Suitable for various attachment methods
- Easy detachment of the product
- Manufactured in accordance with DIN 60005



Product data sheet – Single-use lifting strap

Product table

disposable loop (DIN 60005)							
Art. no.	Effective working length/EWL	Circumference/ CIRU.	WLL	Safety factor	Width	Material	Standard
800361	40 cm	80 cm	800 kg	5:1	48 mm	100% Polyester	DIN 60005
800362	50 cm	100 cm	800 kg	5:1	48 mm	100% Polyester	DIN 60005
800363	60 cm	120 cm	800 kg	5:1	48 mm	100% Polyester	DIN 60005
800381	80 cm	160 cm	800 kg	5:1	48 mm	100% Polyester	DIN 60005
800382	100 cm	200 cm	800 kg	5:1	48 mm	100% Polyester	DIN 60005
800383	120 cm	240 cm	800 kg	5:1	48 mm	100% Polyester	DIN 60005
Load bearing capacity							
Simply direct	Simply laced		Simply turned	7° - 45°		45° - 60°	
800 kg	640 kg		1600 kg	1120 kg		800 kg	
							

If you are not familiar with the application of the product at hand, especially with the handling according to given regulations, it is essential to get in contact with our technical application support department (Technik@eurotec.team).