

THE PROFOOT PEDESTAL RANGE

The ProFoot Adjustable Pedestal range creates that seamless indoor outdoor flow that is so important to the Kiwi lifestyle.



Adjustable Pedestal solutions from 10mm to 500mm+. Versatile applications thanks to a modular system comprising of various base pedestals.

Extension rings which provide a simple solution to achieve additional height where required, in conjunction with a range of adapters to suit timber, stone or the EVO aluminium substructure.



BENEFITS

- Suitable for Decking and Stone Pavers
- Solutions for low levels where low assembly height is critical
- Use our EVO aluminium substructure or timber joists
- Range of fixing options from stainless steel screws to concealed fixing option
- Comprehensive range of components to form fascia's, stairs and ramps.

PROFOOT




The ProFoot Pedestal range provides an array of solutions for the substructure. Select the appropriate adaptor and simply 'click' into the pedestal head.

Timber joists can be side fixed into the 'L' adaptor making installation effortless.

Click adapters



The 'Click' adapters are designed to suit the EVO aluminium substructure system. The 'Click' Adapter fits into the pedestal head and the EVO profile clicks into the adapter providing a quick and stable connection.

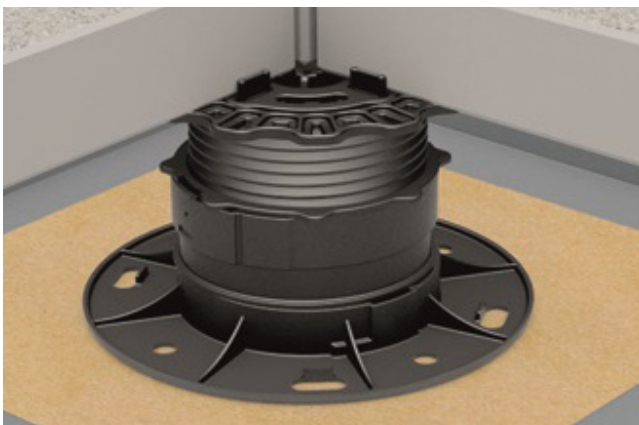

Stone adapters



The 'Stone' adapter fits into the pedestal head. The tabs on the adapter can be snapped off as required to suit the location of the tile. The 2.5mm tab provides an attractive negative detail which allows for water run off from the surface of the tile.

PROFOOT

The EVO range of profiles offer a comprehensive suite of sub-structures to support your deck. The aluminium profiles provide a straight, true and dimensionally stable sub-structure to support timber or stone. EVO profiles are supplied in 4.0m lengths.



EVO 40 provides a robust sub-structure with the ability to span greater distances between pedestals.

EVO Slim at 20mm high is ideal where low height assembly is critical whilst still providing a dimensionally stable platform.



EVO Light is specifically designed for timber decking, whether direct screw fixing or with the EVO Light concealed fixings.


The ProFoot range offers a multitude of aesthetic solutions from fascia options for complementing the front edge of a deck to componentry for forming stairs and ramps.



DrainTec profile offers an aesthetic finish to the perimeter of decks or simply run adjacent to the structure. The geometry prevents splashback from the deck staining the cladding.


PROFOOT

Fastening options include direct screw fix through the EVO aluminium profile to hidden fastenings options for timber and composite decking.

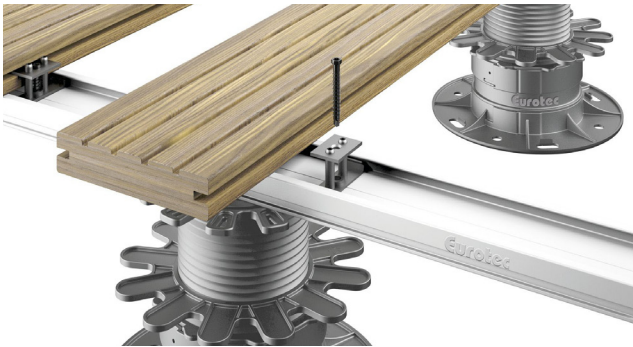

The Twin System Clip locks into the EVO sub-structure. The groove decking boards are fitted in place then secured with the stainless steel clamping plate. The Twin System Clip is ideal for composite decking.

Deck Gliders come in two sizes and can be used with dimensionally stable timber. The gliders are screw fixed to the underside of the decking and sit within the top channel of the EVO profile.

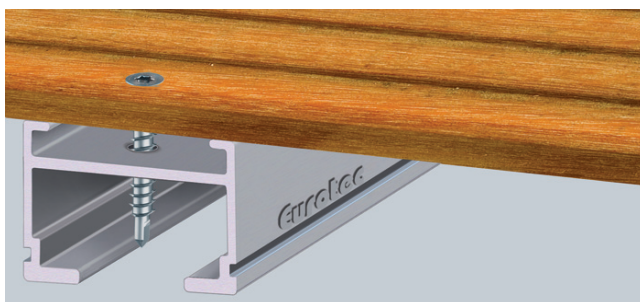

We have a range of A4 stainless steel screws for timber to timber fixing and timber decking to the EVO aluminium profile. Screws are compliant with German standards.

For further information refer to our website or call us for assistance in design or calculating quantities for your next deck.

